


**Stainless Steel
At Its Best**

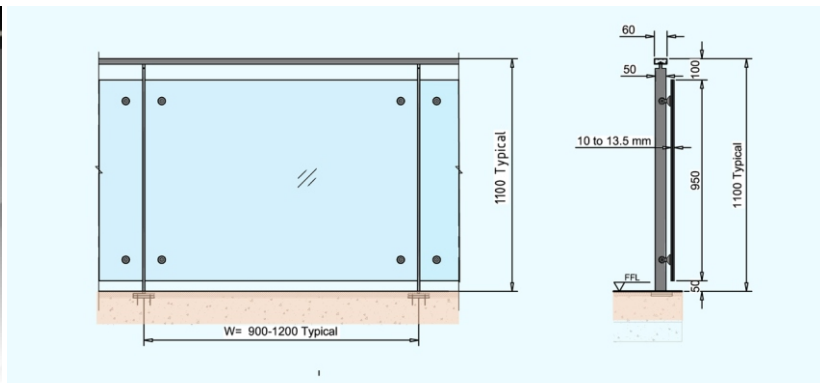

Specifications :

Pitch	Glass	Interlayer	Height	Linear Load
1000 mm	6+1.52+6 mm	PVB I Sentryglas Plus	1100	1.5 kN/m
1200 mm	6+1.52+6 mm	PVB I Sentryglas Plus	1100	1.25 kN/m
1500 mm	8+1.52+6 mm	PVB I Sentryglas Plus	1100	1.00 kN/m

Note:

Please contact us for other load values. The load values above are indicative only for preliminary selection. Please contact us with full load details for proper design.

Advantages :

It is the ideal system for balconies, stairs and building fences with high architectural standards. It offers an impressive and functional result

- Excellent design.
- Options of SS 316L, 316, 304
- Easy to clean.
- Complies with most Standards.

GSC Suggests :

GSC's policy has always been to provide completely safe and reliable products to its customers. For us both passive and active safety is important. GSC, therefore recommends to use Tempered Laminated glasses with 5, 6 and 8 mm thickness x2 and an interlayer consisting of 0.76 to 1.52 mm PVB layer or Sentry Glass plus layer for additional safety.